



[Home](#) › [Tools](#) › [Babel Fish Translation](#) › [World Keyboard - Translated Text](#) 

Babel Fish Translation

[Help](#)

In English:

the magnetic alternating field, which is taken up by the coil 9, produced by coil 11, produces therein an alternating voltage. as a result of the parallel switched condenser 9a arises a resonant circuit, which is co-ordinated with frequency the magnetic alternating field. of reel delivered alternating voltage an electric rectifier 6 one supplies, from it the operating voltage for the modulator 7a as well as over the line 5 for the circuit part 2 one produces.

Search the web with this text

Translate again - Enter up to 150 words





Translate

Add Babel Fish Translation to your site.

Tip: If you do not want a word to be translated add a x on each side of it. Eg: I love xPinkx xFloydx



Global Services


[Calling Cards](#)

[World Travel](#) 

[Language School](#)

[Cellular Phones](#) 

[Learn German](#)

[Germany Travel](#) 

Babel Fish Translation To

Translate e-mails!

Add translation to you

Seamless translation for MSOffice - Word, PowerPoint, Excel, Internet Explorer Outlook!



[Business Services](#) [Submit a Site](#) [About AltaVista](#) [Privacy Policy](#) [Help](#)


© 2004 Overture Services, Inc.



Help

Transaction data delivered by this circuit 2 over the line 3a are supplied to the modulator 7a, which reels a load modulation and/or the resonant circuit of the 9, 9a produced, for example as both coil connections a parallel switched transistor are switched on and off

Translate again - Enter up to 150 words



Seamless translation for MSOffice - Word, Po Excel, Internet Explorer Outlook!



© 2004 Overture Services, Inc.



[Home](#) > [Tools](#) > [Babel Fish Translation](#) > [World Keyboard - Translated Text](#) 

Babel Fish Translation


[Help](#)

In English:

If the load of the resonant circuit 9, 9a is changed, changes also the river, which flows by the coil 11 coupled with the coil 9, and which become on the line 3a produced data on the line 17a leading to the data processing equipment 18 recovered.

Search the web with this text

Translate again - Enter up to 150 words

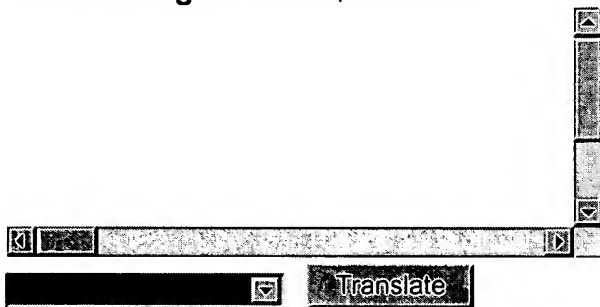


Add Babel Fish Translation to your site.

Tip: If you do not want a word to be translated add a x on each side of it. Eg: I love xPinkx xFloydx



Global Services

[Calling Cards](#)

[World Travel](#) 

[Language School](#)

[Cellular Phones](#) 

[Learn German](#)

[Germany Travel](#) 

Babel Fish Translation To

[Translate e-mails!](#)

[Add translation to you](#)

[Seamless translation](#) for MSOffice - Word, PowerPoint, Excel, Internet Explorer Outlook!



[Business Services](#) [Submit a Site](#) [About AltaVista](#) [Privacy Policy](#) [Help](#)

© 2004 Overture Services, Inc.



[Home](#) › [Tools](#) › [Babel Fish Translation](#) › **World Keyboard - Translated Text**

Babel Fish Translation

In English:

The mouse 1 contains a ball 36, which turns with the movement of the mouse 1 over the document 20 in this example, and turn converted by that here as block represented circuit part of 2 in data and supplied which to the circuit part of 4.

Search the web with this text

Translate again - Enter up to 150 words

Add Babel Fish Translation to your site.

Tip: Click the "World Keyboard" link for a convenient method of entering accented or Russian characters.



Global Services

Calling Cards

World Travel 

Language School

Cellular Phones

Learn German

Germany Travel

Babel Fish Translation To

Translate e-mails!

Add translation to you

Seamless translation for MSOffice - Word, Po Excel, Internet Explorer Outlook!



[Business Services](#) [Submit a Site](#) [About AltaVista](#) [Privacy Policy](#) [Help](#)

© 2004 Overture Services, Inc.



[Home](#) › [Tools](#) › [Babel Fish Translation](#) › [Translated Text](#)

Babel Fish Translation

In English:

In this way the energy will be transferred for the enterprise of the circuit from the circuit parts of 2 and 4 by the magnetic field of the coil 11 to the coil 9, as by the arrow 8a is suggested, protecting data more over this way in accordance with off the arrow eb in veiden directions übertragen to become to können.

Search the web with this text

Translate again - Enter up to 150 words

Auf diese Weise wird die Energie zum Betrieb der Schaltung aus den Schaltungsteilen 2 und 4 durch das Magnetfeld von der Spule 11 zur Spule 9 übertragen, wie durch den Pfeil 8a angedeutet ist, während Daten über diesen Weg gemäß dem Pfeil eb in beiden Richtungen übertragen werden können.

Use the [World Keyboard](#) to enter accented or Cyrillic characters.



Translate

Add Babel Fish Translation to your site.

Tip: Compare the translation with the original by clicking the "View Original Language" link on a translated web page.



[Help](#)

Global Services

[Calling Cards](#)

[World Travel](#)

[Language School](#)

[Cellular Phones](#)

[Learn German](#)

[Germany Travel](#)

Babel Fish Translation To

[Translate e-mails!](#)

[Add translation to you](#)

[Seamless translation](#) for MSOffice - Word, PowerPoint, Excel, Internet Explorer, Outlook!



[Business Services](#)

[Submit a Site](#)

[About AltaVista](#)

[Privacy Policy](#)

[Help](#)

© 2004 Overture Services, Inc.

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2001-159948

(43)Date of publication of application : 12.06.2001

(51)Int.Cl.

G06F 3/033

(21)Application number : 11-376161

(71)Applicant : BAITEKKUSU:KK

(22)Date of filing : 01.12.1999


(72)Inventor : SHIMONO HEIHACHI

(54) BATTERYLESS CORD-FREE MOUSE DEVICE

(57)Abstract:

PROBLEM TO BE SOLVED: To wirelessly transmit the information of a computer mouse having cord-free constitution and to wirelessly transmit power supply for the mouse to the mouse.

SOLUTION: An oscillator is constituted by unifying the cord-free mouse with a mouse pad, and the oscillation frequency of the oscillator is determined by a constant of a resonance circuit in the mouse. Part of oscillation voltage is rectified in the mouse and used for mouse power supply. The information of an encoder or a button switch in the mouse is encoded by a CPU built in the mouse. The HI/LO voltage of the code is applied to a varactor diode constituting part of the resonance circuit to frequency-modulate the oscillation frequency. The modulated wave is taken out by the mouse pad side and demodulated by a frequency discriminator built in the mouse pad and the demodulated wave is transmitted to a computer through a CPU built in the mouse pad.

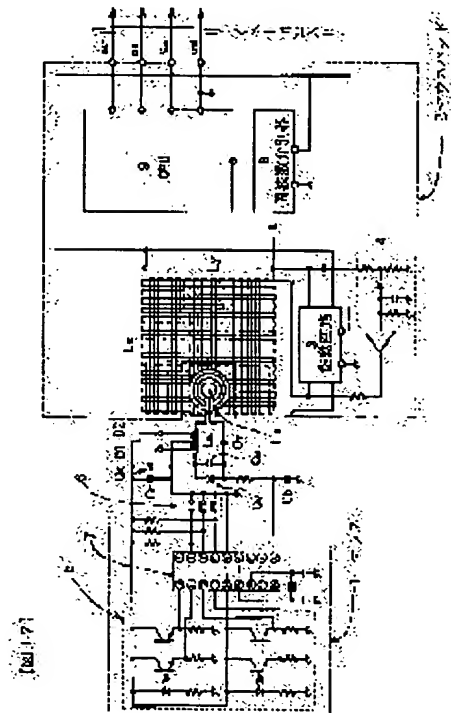

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than
the examiner's decision of rejection or
application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's
decision of rejection]

[Date of requesting appeal against examiner's
decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office